

Eight *evp*

EMERGENCY VEHICLE PRODUCTS
MANUFACTURER

Eight EVP LLC

Nashville Tennessee

www.8evp.com



Table Of Contents

Eight

evp

| | Page |
|--|-------|
| WARNING LIGHT, LIGHTHEADS | 3-6 |
| HIDE-AWAY | 6 |
| DASH LIGHTS | 7 |
| BEACON | 7 |
| SIREN | 7 |
| MINI LIGHTBAR | 8 |
| TAG FRAMES | 9-11 |
| BRACKETS | 12-13 |
| CABINET LIGHT / INTERIOR LIGHTS / STIX | 14-19 |
| STIX QUICK CONNECT SYSTEM | 17 |
| WORK LIGHTS / DRIVING LIGHTS | 20-22 |
| LED FLASHER | 21 |
| WORK LIGHTBAR | 23 |

New Products for 2023

Black Housing Stix

Now available in 24 inch dual color dual switched amber-white Page 16



Dual color Stix non switched.

Various lengths in; red-blue, red-white, and amber-white. Page 16



These products are currently in the design and testing stages.

Traffic Director

Using our current slimline EOS modules we are working on a waterproof traffic director / warning light. This product will be dual color and dual function. This versatility will allow both warning functions and traffic directs from the same unit. Currently specifications are not locked in but we are hoping to have one of the slimmest bars available.


Quad color pencil warning light

Currently in the early design phases this light will have 4 colors (Red, Blue, Amber and white) with LED's built into a very narrow lighthouse. If you have any requirements that you would like to see in this light please let us know before we lock in designs and specifications.

HERCULES H103

SPECIFICATIONS


Operating Voltage: 10~40VDC
Flash Patterns: 22
Operating temperature: -22f to +131f
Sync: 12+ units
Max. Current: 0.5A @ 12.5 VDC
Max. Power: 9W
Length: 3, 3/16" (80.6mm)
Width: 1, 5/16" (32.6mm)
Height: 13/16" (21mm)
Hole spacing: 2, 23/32" (69mm)
Certifications: SAE J595 Class 1, CA TITLE 13 class B, Red, Blue, White & Amber.
Warranty: 5 Years
Waterproof: IP 67

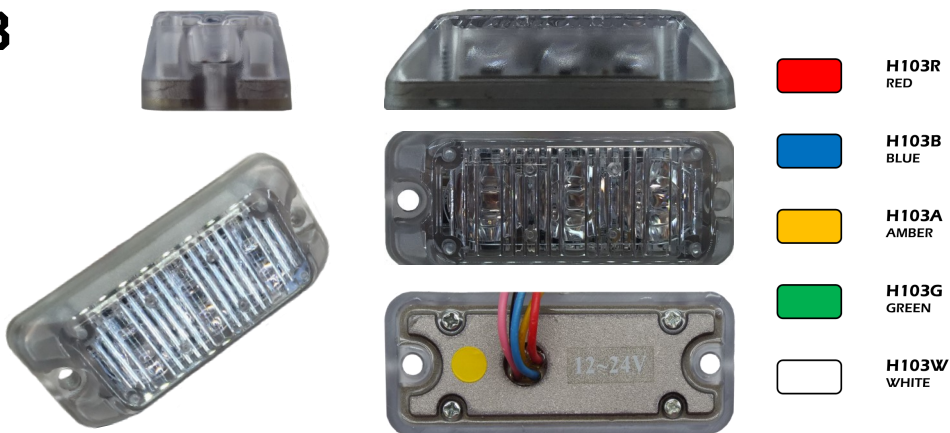

HERCULES H106

SPECIFICATIONS


Operating Voltage: 10~40VDC
Flash Patterns: 22
Operating temperature: -22f to +131f
Sync: 12+ units
Max. Current: 1A @ 12.5 VDC
Max. Power: 18W
Length: 5, 5/16" (136mm)
Width: 1, 5/16" (32.6mm)
Height: 13/16" (21mm)
Hole spacing: 4, 7/8" (124mm)
Certifications: SAE J595 Class 1, CA TITLE 13 class B, Red, Blue, White & Amber.
Warranty: 5 Years
Waterproof: IP 67

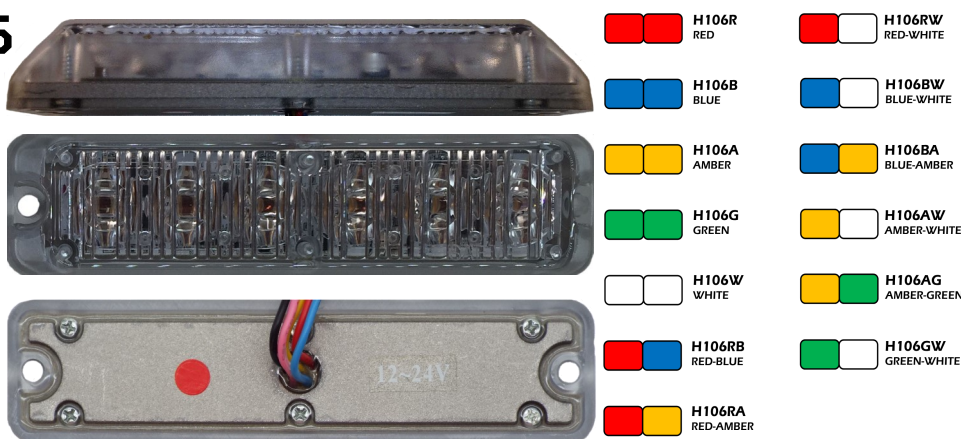

HERCULES H202

SPECIFICATIONS


Operating Voltage: 10~40VDC
Flash Patterns: 22
Operating temperature: -22f to +131f
Sync: 12+ units
Max. Current: 0.8A @ 12.5 VDC
Max. Power: 12W
Length: 2, 7/8" (73mm)
Width: 2, 1/16" (53mm)
Height: 13/16" (21mm)
Hole spacing: 2, 7/32" (56.5mm)
Certifications: SAE J595 Class 1, CA TITLE 13 class B, Red, Blue, White & Amber.
Warranty: 5 Years
Waterproof: IP 67

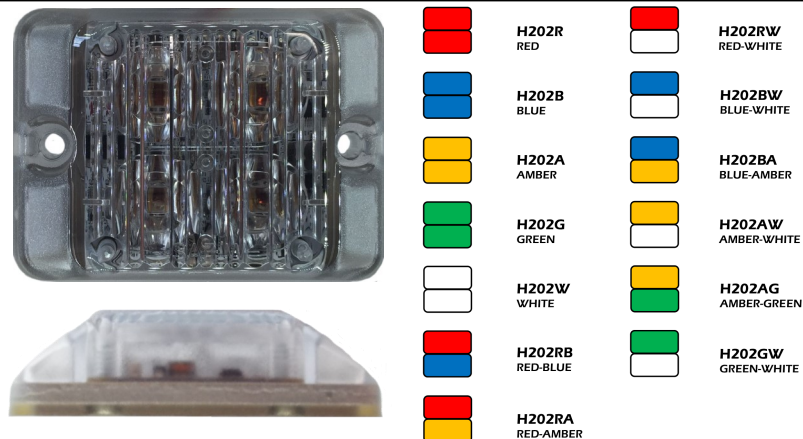

HERCULES H203

SPECIFICATIONS

Operating Voltage: 10~40VDC
Flash Patterns: 22
Operating temperature: -22f to +131f
Sync: 12+ units
Max. Current: 0.5A @ 12.5 VDC
Max. Power: 18W
Length: 3, 9/16" (91mm)
Width: 2, 1/16" (53mm)
Height: 13/16" (21mm)
Hole spacing: 2, 29/32" (74mm)
Certifications: SAE J595 Class 1, CA TITLE 13 class B, Red, Blue, White & Amber.
Warranty: 5 Years
Waterproof: IP 67

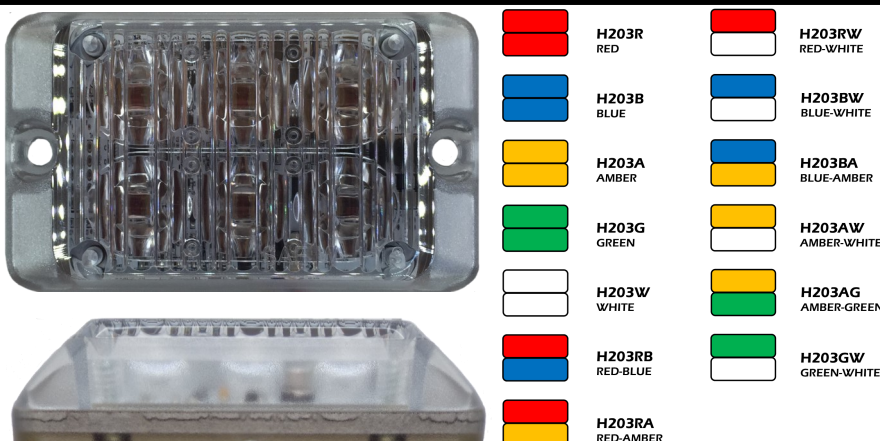

EOS E106

SPECIFICATIONS

Operating Voltage: 10~40VDC
Flash Patterns: 42
Operating temperature: -22f to +131f
Sync: 12+ units
Max. Current: 1A @ 12.5 VDC
Max. Power: 18W
Length: 5, 1/6" (129mm)
Width: 1, 1/4" (31mm)
Height mounted: 3/8" (10mm)
Height total: 1/2" (12mm)
Hole spacing: 4, 11/16" (119mm)
Certifications: SAE J595 Class 1, CA TITLE 13 class B, Red, Blue, White & Amber. SAE approved for both vertical and horizontal mounting.
Warranty: 5 Years
Waterproof: IP 67



| | | | |
|--|----------------------------|--|------------------------------|
| | E106R RED | | E106RW RED-WHITE |
| | E106B BLUE | | E106BW BLUE-WHITE |
| | E106A AMBER | | E106BA BLUE-AMBER |
| | E106G GREEN | | E106AW AMBER-WHITE |
| | E106W WHITE | | E106AG AMBER-GREEN |
| | E106P PURPLE | | E106GW GREEN-WHITE |
| | E106RB RED-BLUE | | E106RG RED-GREEN |
| | E106RA RED-AMBER | | |

EOS E106 DUAL COLOR

SPECIFICATIONS

Dual color, dual control.
 Can be controlled independently.
Operating Voltage: 10~40VDC
Flash Patterns: 64 single color, 102 dual color
Operating temperature: -22f to +131f
Sync: 12+ units
Max. Current: 1A @ 12.5 VDC
Max. Power: 18W
Length: 5, 1/6" (129mm)
Width: 1, 1/4" (31mm)
Height mounted: 3/8" (10mm)
Height total: 1/2" (12mm)
Hole spacing: 4, 11/16" (119mm)
Certifications: SAE J595 Class 1, CA TITLE 13 class B, Red, Blue, White & Amber.
Warranty: 5 Years
Waterproof: IP 67



| | | | |
|-----------------------------|--|-------------------------------|--|
| E106DRB RED-BLUE | | E106DBA BLUE-AMBER | |
| E106DRA RED-AMBER | | E106DBW BLUE-WHITE | |
| E106DRW RED-WHITE | | E106DAW AMBER WHITE | |

EOS E106 VERTICLE OPTICS

SPECIFICATIONS

Operating Voltage: 10~40VDC
Flash Patterns: 42 single color, 102 dual color
Operating temperature: -22f to +131f
Sync: 12+ units
Max. Current: 1A @ 12.5 VDC
Max. Power: 18W
Length: 5, 1/6" (129mm)
Width: 1, 1/4" (31mm)
Height mounted: 3/8" (10mm)
Height total: 1/2" (12mm)
Hole spacing: 4, 11/16" (119mm)
Certifications: SAE J595 Class 1, CA TITLE 13 class B, Red, Blue, White & Amber. SAE approved for both vertical mounting.
Warranty: 5 Years
Waterproof: IP 67



| | | | | | |
|--|------------------------|--|------------------------------|--|--------------------------------|
| | EV106R RED | | EV106DRB RED-BLUE | | EV106DBW BLUE-WHITE |
| | EV106B BLUE | | EV106DRA RED-AMBER | | EV106DBA BLUE-AMBER |
| | EV106A AMBER | | EV106DRW RED-WHITE | | EV106DAW AMBER-WHITE |
| | EV106G GREEN | | | | |
| | EV106W WHITE | | | | |

EOS E104

SPECIFICATIONS

Operating Voltage: 10~40VDC
Flash Patterns: 42
Operating temperature: -22f to +131f
Sync: 12+ units
Max. Current: 0.6A @ 12.5 VDC
Max. Power: 12W
Length: 3, 13/16" (97mm)
Width: 1, 3/16" (29.5mm)
Height mounted: 3/8" (10mm)
Height total: 1/2" (12mm)
Hole spacing: 3, 7/16" (87mm)
Certifications: SAE J595 Class 1, CA TITLE 13 class B, Red, Blue, White & Amber.
Warranty: 5 Years
Waterproof: IP 67



| | | | |
|--|----------------------------|--|------------------------------|
| | E104R RED | | E104RW RED-WHITE |
| | E104B BLUE | | E104BW BLUE-WHITE |
| | E104A AMBER | | E104BA BLUE-AMBER |
| | E104G GREEN | | E104AW AMBER-WHITE |
| | E104W WHITE | | E104AG AMBER-GREEN |
| | E104RB RED-BLUE | | E104GW GREEN-WHITE |
| | E104RA RED-AMBER | | E104RG RED-GREEN |

EOS E202S SQUARE

SPECIFICATIONS

Operating Voltage: 10~40VDC
Flash Patterns: 42
Operating temperature: -22f to +131f
Sync: 12+ units
Max. Current: 0.6A @ 12.5 VDC
Max. Power: 12W
Length: 2, 9/16" (58mm)
Width: 2, 9/16" (58mm)
Height mounted: 3/8" (10mm)
Height total: 1/2" (12mm)
Hole spacing: 2, 7/32" (56.5mm)
Certifications: SAE J595 Class 1, CA TITLE 13 class B, Red, Blue, White & Amber.
Warranty: 5 Years
Waterproof: IP 67



| | | | |
|--|-----------------------------|--|-------------------------------|
| | E202SR RED | | E202SRW RED-WHITE |
| | E202SB BLUE | | E202SBW BLUE-WHITE |
| | E202SA AMBER | | E202SBA BLUE-AMBER |
| | E202SG GREEN | | E202SAW AMBER-WHITE |
| | E202SW WHITE | | E202SAG AMBER-GREEN |
| | E202SRB RED-BLUE | | E202SGW GREEN-WHITE |
| | E202SRA RED-AMBER | | E202SRG RED-GREEN |

EOS E202R ROUND

SPECIFICATIONS

Operating Voltage: 10~40VDC
Flash Patterns: 42
Operating temperature: -22f to +131f
Sync: 12+ units
Max. Current: 0.6A @ 12.5 VDC
Max. Power: 12W
Length: 5, 19/32" (66mm) round
Height mounted: 3/8" (10mm)
Height total: 1/2" (12mm)
Hole spacing: 2, 5/16" (58mm)
Certifications: SAE J595 Class 1, CA TITLE 13 class B, Red, Blue, White & Amber.
Waterproof: IP 67



| | | | |
|--|-----------------------------|--|-------------------------------|
| | E202RR RED | | E202RRW RED-WHITE |
| | E202RB BLUE | | E202RBW BLUE-WHITE |
| | E202RA AMBER | | E202RBA BLUE-AMBER |
| | E202RG GREEN | | E202RAW AMBER-WHITE |
| | E202RW WHITE | | E202RAG AMBER-GREEN |
| | E202RRB RED-BLUE | | E202RGW GREEN-WHITE |
| | E202RRA RED-AMBER | | E202RRG RED-GREEN |

ALECTRONA

FEATURES

- Fully encapsulated for moisture and vibration resistance.
- Dimmable.
- Aluminum base aids in heat dissipation.
- Reverse polarity protection.
- UV resistant polycarbonate lens.

SPECIFICATIONS

Operating Voltage: 12~24VDC

Flash Patterns: 18

Operating temperature: -22f to +131f

Sync: 12+ units

Max. Current: 0.6A @ 12.5 VDC



Max. Power: 9W

Length: 2, 15/16" (75mm) **Width:** 1, 3/8" (35mm)

Height : 1, 1/4" (32mm) **Hole spacing:** 2, 7/8" (73mm)

Certifications: SAE J595 Class 1, CA TITLE 13 class B, Red, Blue, White & Amber.

Warranty: 5 Years

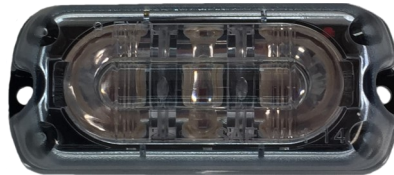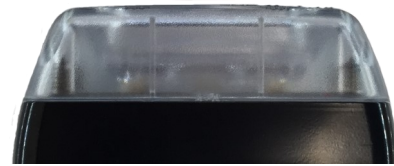

| | |
|--|-----------------------|
| | A103R RED |
| | A103B BLUE |
| | A103A AMBER |
| | A103G GREEN |
| | A103W WHITE |

LASER HIDEAWAY

FEATURES

- 10 x high intensity 3 watt LED's.
- Can be mounted inside headlight, tail light, or externally.
- Available in solid color or dual color.
- Fits industry standard 1 inch hole.
- 22 (single color) and 26 (dual color) user selectable flash patterns.
- Waterproof connector between light head and flasher, IP67.
- UV resistant polycarbonate lens.
- 5 year warranty.
- Chrome bezel available.
- Dimmable.

SPECIFICATIONS

Operating Voltage: 10~40VDC

Flash Patterns: 22 (single color) and 26 (dual color)

Operating temperature: -22f to +131f

Sync: 12+ units

Max. Current: 1.5A @ 12.5 VDC

Max. Power: 30W



| | | | |
|--|----------------------------|--|-------------------------------|
| | L10HR RED | | L10H-RA RED-AMBER |
| | L10HB BLUE | | L10H-RW RED-WHITE |
| | L10HA AMBER | | L10H-BA BLUE-AMBER |
| | L10HG GREEN | | L10H-BW BLUE-WHITE |
| | L10HW WHITE | | L10H-RB RED-BLUE |
| | L10H-RB RED-BLUE | | L10H-AW AMBER-WHITE |

LASER HIDEAWAY 45

FEATURES

- 10 x high intensity 3 watt LED's.
- Unique 45 degree light output.
- Can be mounted inside headlight, tail light, or externally.
- Available in solid color or dual color.
- Fits industry standard 1 inch hole.
- 22 (single color) and 26 (dual color) user selectable flash patterns.
- Waterproof connector between light head and flasher, IP67.
- UV resistant polycarbonate lens.
- 5 year warranty.
- Chrome bezel available.
- Dimmable.

SPECIFICATIONS

Operating Voltage: 10~40VDC

Flash Patterns: 22 (single color) and 26 (dual color)

Operating temperature: -22f to +131f

Sync: 12+ units

Max. Current: 1.5A @ 12.5 VDC

Max. Power: 30W



| | | | |
|--|----------------------------|--|-------------------------------|
| | L10SR RED | | L10S-RA RED-AMBER |
| | L10SB BLUE | | L10S-RW RED-WHITE |
| | L10SA AMBER | | L10S-BA BLUE-AMBER |
| | L10SG GREEN | | L10S-BW BLUE-WHITE |
| | L10SW WHITE | | L10S-RB RED-BLUE |
| | L10S-RB RED-BLUE | | L10S-AW AMBER-WHITE |

DASH 6

SPECIFICATIONS

Part Number: DS600
Operating Voltage: 10~40VDC
Flash Patterns: 40
Operating temperature: -22f to +131f
Sync: 12+ units
Max. Current: 1A @ 12.5 VDC
Max. Power: 18W

FEATURES

- 6 x high intensity 3 watt LED's.
- Sturdy aluminum bracket holds three suction cups.
- Available in solid color or split (3x3).
- Cigar plug is fitted with an on/off .
- Pattern change switch is on the back of the unit.
- 40 user selectable flash patterns.
- Reverse polarity protection.
- UV resistant polycarbonate lens.
- 5 year warranty.
- Certifications: SAE J595 Class 1, CA TITLE 13 class B, Red, Blue, White & Amber.



| | | | |
|--|-----------------------|--|-------------------------|
| | DS600-R RED | | DS600-RW RED-WHITE |
| | DS600-B BLUE | | DS600-BW BLUE-WHITE |
| | DS600-A AMBER | | DS600-BA BLUE-AMBER |
| | DS600-G GREEN | | DS600-AW AMBER-WHITE |
| | DS600-W WHITE | | DS600-AG AMBER-GREEN |
| | DS600-RB RED-BLUE | | DS600-GW GREEN-WHITE |
| | DS600-RA RED-AMBER | | |



HURRICANE BEACON

FEATURES

- Low profile LED beacon.
- 12 x 3 watt high intensity LED's.
- Extra 6 upward facing LED's so light is viewable from above.
- Available in solid, split color.
- Permanent mount or suction magnetic mount with cig plug.
- Dimmable, Cruise mode.
- Multi-unit synchronization.
- 26 user selectable flash patterns.
- Aluminum base aids in heat dissipation.
- Magnetic version has rubber boot to protect the vehicle and suction effect holds with magnet.
- UV resistant polycarbonate lens.
- 5 year warranty.
- Certifications: SAEJ845 Class 1, CA Title 13
- Waterproof IP67



SPECIFICATIONS

Operating Voltage: 10~40VDC.
Flash Patterns: 26.
Operating temperature: -22f to +131f.
Sync: 12+ units.
Max. Current: 3A @ 12.5 VDC.
Max. Power: 36W.

| | | | |
|--|-----------------|--|-----------------|
| | HR18R RED | | HR18RA WHITE |
| | HR18B BLUE | | HR18RW WHITE |
| | HR18A AMBER | | HR18BA WHITE |
| | HR18G GREEN | | HR18BW WHITE |
| | HR18W WHITE | | HR18AW WHITE |
| | HR18RB WHITE | | HR18AG WHITE |

THOR 200W SIREN

FEATURES

- Vehicle horn controlled 200 watt siren amplifier.
- Connects to two 100 watt RMS max 11 ohm speakers.
- Only requires on/off toggle switch to operate.
- Wail, Yelp, split (1 speaker Wail, 1 speaker Yelp).
- Applying vehicle horn less than 0.3 seconds cycles through tones.
- Holding vehicle horn longer than 0.3 seconds for Air-horn.

SPECIFICATIONS

Part Number: SR200
Operating Voltage: 10~16VDC
Tones: Wail, Yelp, Combination, Airhorn
Operating temperature: -22f to +131f
Max. Current: 15A @ 12.5 VDC










CYCLONE 18

FEATURES

- 3 watt high intensity LED's.
- Available in solid, split color.
- Dimmable, Cruise mode.
- Permanent mount or suction magnetic mount with cigar plug.
- 9' long (2.7m) Cable (mag version has dual switched cig plug with On/off and pattern change switches)
- Multi-unit synchronization.
- User selectable flash patterns. 42 for the CY18
- Magnetic version has rubber boots to protect vehicle and suction effect holds with magnet.
- UV resistant polycarbonate lens.
- Certifications: SAEJ845 Class 1.

SPECIFICATIONS

Operating Voltage: 10~40VDC
Flash Patterns: 42
Operating temperature: -22f to +131f
Sync: 12+ units
Max. Current: 3A @ 12.5 VDC
Max. Power: 54W
Length: 11, 13/16" (300mm)
Width: 7, 11/16" (196mm)
Height body: 1,5/8" (41mm)
Height total: 2, 11/16" (69mm) perm 2, 9/19" (66mm) mag
Certifications: SAE J845 class 1.
Warranty: 5 Years
Waterproof: IP 67

| | |
|--|------------------------------------|
|  | CY18-R RED |
|  | CY18-B BLUE |
|  | CY18-A AMBER |
|  | CY18-W WHITE |
|  | CY18-RB RED-BLUE |
|  | CY18-AW AMBER-WHITE |
|  | CY18-CUSTOM CUSTOM BUILT |



CY18M Suction magnetic mount shown










CYCLONE 30

FEATURES

- 3 watt high intensity LED's.
- Available in solid, split color.
- Dimmable, Cruise mode.
- Permanent mount or suction magnetic mount with cigar plug.
- 9' long (2.7m) Cable (mag version has dual switched cig plug with On/off and pattern change switches)
- Multi-unit synchronization.
- User selectable flash patterns. 88 for the CY30
- Magnetic version has rubber boots to protect vehicle and suction effect holds with magnet.
- UV resistant polycarbonate lens.
- Certifications: SAEJ845 Class 1.

SPECIFICATIONS

Operating Voltage: 10~40VDC
Flash Patterns: 42
Operating temperature: -22f to +131f
Sync: 12+ units
Max. Current: 4A @ 12.5 VDC
Max. Power: 90W
Length: 11, 13/16" (300mm)
Width: 7, 11/16" (196mm)
Height body: 1,5/8" (41mm)
Height total: 2, 11/16" (69mm) perm 2, 9/19" (66mm) mag
Certifications: SAE J845 class 1.
Warranty: 5 Years
Waterproof: IP 67

| | |
|---|------------------------------------|
|  | CY30-R RED |
|  | CY30-B BLUE |
|  | CY30-A AMBER |
|  | CY30-W WHITE |
|  | CY30-RB RED-BLUE |
|  | CY30-AW AMBER-WHITE |
|  | CY30-CUSTOM CUSTOM BUILT |



CY30M Permanent mount shown



TAG FRAMES

Many years ago we were asked to come up with a solution that would give the rear of a police vehicle warning lights that could be mounted on most police cars, was self contained, easy to fit and most importantly would not require unsightly holes in the vehicle.

Since then we have designed and built 3 different tag frames. They all mount using the vehicle license plate hardware. For ease of installation Tag frames are self contained, assembled ready to use and they all work with 8EVP and other brands of warning lights and switch controllers.


Our newest and most popular model the U-Tag is adjustable, so if you have the room you can have the whole license plate exposed. But if room is limited the license plate will tuck behind the U-Tag. The side light heads have Vertical optics and with nothing to obstruct a reverse camera they fit most SUV's and cars used by police today.



TAG 2


FEATURES

- Frame sits behind the License plate, secured by the same screws that hold on the plate.
- Available in solid color and split colors.
- Fully encapsulated for moisture and vibration resistance IP67.
- Dimmable, Cruise mode.
- 12 x high intensity 3 watt LED's.
- Multi-unit synchronization.
- 42 single color and 28 split color user selectable flash patterns.
- Sturdy composite plastic frame is lightweight and strong.
- UV resistant polycarbonate lens.
- 5 year warranty.
- Certifications: SAE J595 Class 1, CA TITLE 13 class B, Red, Blue, White & Amber.

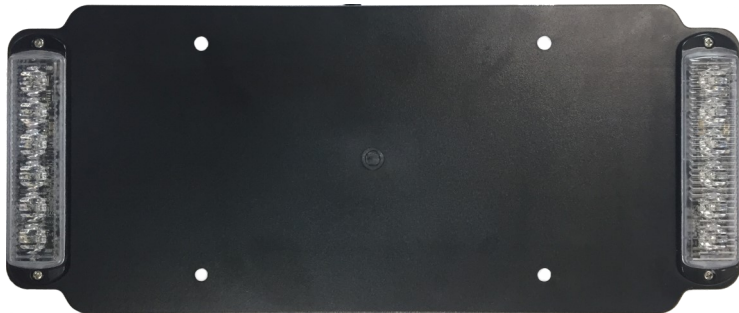

SPECIFICATIONS

Operating Voltage: 10~40VDC
Flash Patterns: 42 (single color)
 28 (split color)
Operating temperature -22f to +131f
Sync: Yes
Max. Current: 2A @ 12.5 VDC
Max. Power: 36W
Colors: Red, Blue, Amber, Green, White & most combinations

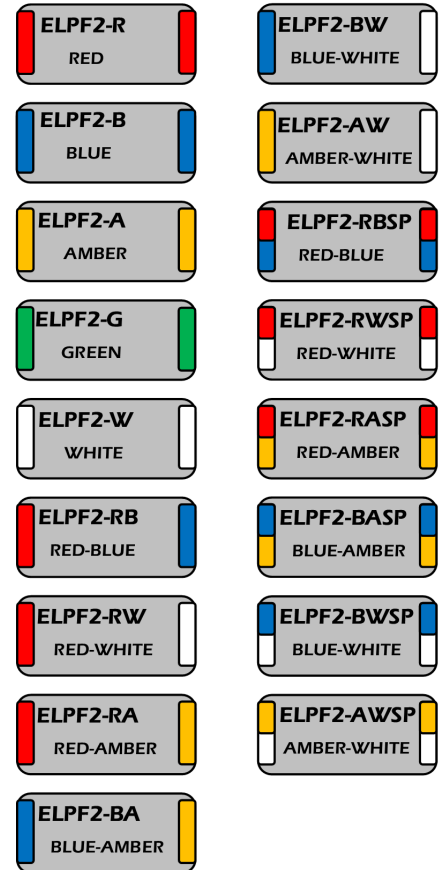

TAG 4


FEATURES

- Tag 4 sits over the License plate, secured by the same screws that hold on the plate.
- Fully assembled ready to install.
- Fully encapsulated, IP67
- 24 x high intensity 3 watt LED's,
- Dimmable.
- 49 user selectable flash patterns.
- Sturdy composite plastic frame is light & strong.
- Reverse polarity protection.
- UV resistant polycarbonate lens.
- 5 year warranty.
- Certifications: SAE J595 Class 1, CA TITLE 13 .



SPECIFICATIONS

Operating Voltage: 10~16VDC
Flash Patterns: 49
Operating temperature -22f to +131f
Max. Current: 4.5A @ 12.5 VDC
Max. Power: 72W

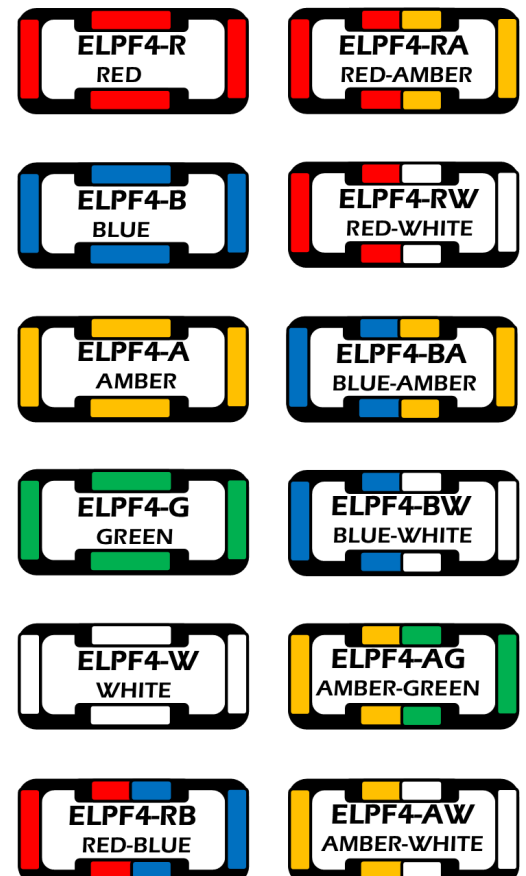

U TAG


FEATURES

- The Eight EVP **Patented** U-Tag Frame sits around the License plate, secured by the same screws that hold on the plate.
- Adjustable to allow maximum plate exposure.
- At 1/32" thick at the top it will not obstruct vehicle reverse cameras.
- Side LED's are angled out for great corner lighting. And now use **vertical** optics
- Light-heads are pre-wired to a controller for versatility in flash patterns.
- Fully encapsulated for moisture (IP67) and vibration resistance.
- Save time, this universal design allows for a quick installation.
- 2 Control wires for 2 selectable flash patterns or Steady burn.
- Dual colors can be used as area lighting and warning light.
- Synchronizable with EOS warning lights.
- 34 single color and 45 dual color user selectable flash patterns.
- Sturdy composite plastic frame is lightweight and strong.
- UV resistant polycarbonate lens.
- Dimmable.
- 5 year warranty.
- Certifications: SAE J595 Class 1, CA TITLE 13 class B, Red, Blue, White & Amber.



SPECIFICATIONS

Operating Voltage: 10~16VDC
Flash Patterns: 34 (single color) 45 (Dual color)
Operating temperature -22f to +131f
Sync: Yes
Max. Current: 2A @ 12.5 VDC
Max. Power: 72W
US Patent 10017132

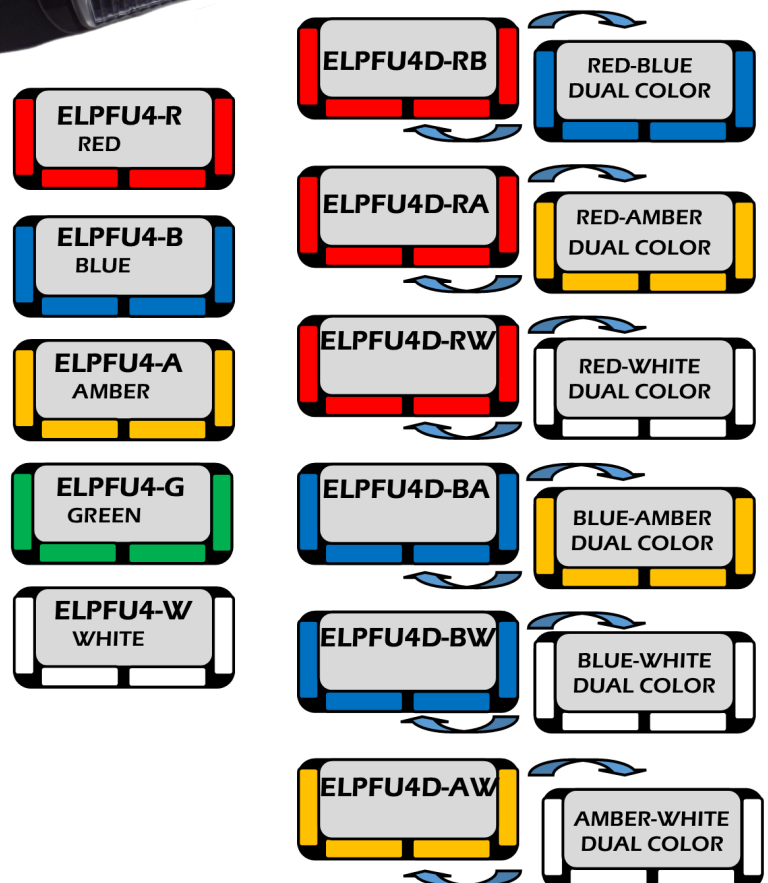

BRACKETS



FOR EOS E104



BKEOS4B
90 degree



BKEOS4F
flat



BKEOS4B2
Dual 90 degree



FOR EOS E106



BKEOS6B
90 degree



BKEOS6F
flat



BKEOS6B2
Dual 90 degree



BKEOS6F2
Dual flat



BKEOS6S2
Dual side by side 90



BKEOS6-A
Adjustable



FOR EOS SQUARE AND ROUND



BKE202SRB
For EOS square or round

TAG FRAMES



ELPF2-BLANK
Tag2 with no lights



ELPF4-BLANK
Tag4 with no lights



FOR HERCULES H103



BKH103B
90 degree



BKH103F
Flat



FOR HERCULES H202



BKH202B
90 degree



BKH202F
Flat



FOR HERCULES H203



BKH203B
90 degree



BKH203F
Flat



FOR HERCULES H106



BKH106B
90 degree



BKH106F
Flat



BKEOS6-A
Adjustable

CABINET LIGHTS



Whether it be a fire appliance, ambulance, police car, service truck, overland vehicle, camper, RV or any other use, quality 12v lighting can be make any task after hours safe and illuminating.


Oz4WD has a cabinet lighting solution to suit most vehicle needs. From waterproof lighting inside a Fire appliances cabinets, to dual colored, dual switched lighting for police vehicle for white or red night vision friendly illumination, we have it all.

Stix are an LED cabinet light built in a sturdy rigid aluminum housing, with the electronics encapsulated in a impact resistant silicon seal. This makes the light suitable for just about anywhere you need light. The Stix are even available in red, blue, amber, green as well as the usual white LED's, and you can also add a waterproof switch on the strip as well.

Popular with Police and Fire departments is our dual color dual switched red and white Stix. The white LEDs are great for general duties, but if the officer has to switch to tactical operation a flick of the switches will give you red LEDs and preserve his night vision when he leaves the vehicle.

The Dual color dual switched Stix are also popular with campers, overlanders and RV owners. In amber-white configuration the amber gives great light but is not so attractive to bugs like white light.

New for 2023; STIX quick connect system for fast installation to save you time.

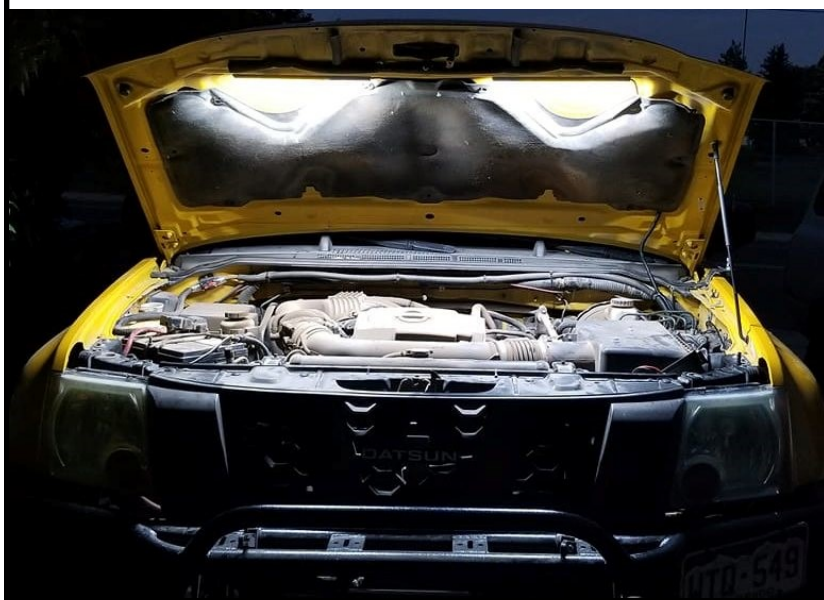

STIX

FEATURES

- 50/50 LED, rigid strip lighting.
- IP65 waterproof Cabinet lighting.
- Can be used inside or outside.
- Aluminum housing protects LED's.
- Available in lengths from 7 inches to 48 inches.
- Switched or hardwired options available.



SPECIFICATIONS

Operating Voltage: 12VDC
 3/8" (10mm) high, 11/16" (18mm) wide, 6" - 48" long
Max power 1.44Amps (48inch)
 18" molded sheathed cable

| Part # | Length |
|--------|---------------|
| STX1 | 7" (178mm) |
| STX3 | 12.8" (327mm) |
| STX5 | 20.7" (524mm) |
| STX6 | 24.6" (624mm) |
| STX9 | 36.5" (927mm) |
| STX12 | 48" (1225mm) |



STIX FROSTED



FEATURES

- 50/50 LED, rigid strip lighting.
- IP65 waterproof Cabinet lighting.
- Can be used inside or outside.
- Aluminum housing protects LED's.
- Available in lengths from 7 inches to 24 inches.
- frosted outer lens for better light distribution.

SPECIFICATIONS

Operating Voltage: 12VDC
 Size 3/8" (10mm) high, 11/16" (18mm) wide, 7" - 24" long
Max power 0.72 Amps (24inch)
 18" molded sheathed cable

| Part # | Length |
|--------|------------------|
| STXF1 | 7" (178mm) |
| STXF3 | 12.8" (327mm) |
| STXF6 | 24.6" (624mm) |












STIX SWITCHED


FEATURES

- 50/50 LED, rigid strip lighting.
- IP65 waterproof Cabinet lighting.
- Can be used inside or outside.
- Aluminum housing protects LED's.
- White available in lengths from 6 inches to 48 inches.
- Red available in lengths from 6 inches and 12 inches.
- Amber available in a 12 inch length.
- Built in waterproof on/off press switch.

SPECIFICATIONS

Operating Voltage: 12VDC
 Size 3/8" (10mm) high, 11/16" (18mm) wide, 7" - 24" long
Max power 0.72 Amps (48inch)
 18" molded sheathed cable

| Part # | WHITE | RED | AMBER |
|------------------|---|---|--|
| 7" (178mm) | SSTX1  | SSTX1-R  | |
| 12.8" (327mm) | SSTX3  | SSTX3-R  | SSTX3-A  |
| 20.7" (524mm) | SSTX5  | | |
| 24.6" (624mm) | SSTX6  | | |
| 36.5" (927mm) | SSTX9  | | |
| 48" (1225mm) | SSTX12  | | |



REAR

FEATURES

- 50/50 LED, rigid strip lighting.
- IP65 waterproof Cabinet lighting.
- Can be used inside or outside.
- Aluminum housing protects LED's.
- wire enters the rear of the light so it is not visible when surface mounted

SPECIFICATIONS

Part # STX3-REAR
Operating Voltage: 12VDC
 Size 3/8" (10mm) high, 11/16" (18mm) wide, 12.9" (327mm) long
Max power 0.26 Amps (48inch)



ALTERNATE BRACKET

FEATURES

- 50/50 LED, rigid strip lighting.
- IP65 waterproof Cabinet lighting.
- Can be used inside or outside.
- Aluminum housing protects LED's.
- alternate bracket allows mounting from the side

SPECIFICATIONS

Part # STX3-ALT
Operating Voltage: 12VDC
 Size 3/8" (10mm) high, 11/16" (18mm) wide, 12.9" (327mm) long
Max power 0.26Amps
 18" molded sheathed cable



STIX COLORED

FEATURES

- Colored LED rigid strip lighting.
- IP65 waterproof Cabinet lighting.
- Can be used inside or outside.
- Aluminum housing protects LED's.
- Lengths 6", 12", 24" and 48"
- Red, blue, amber, green or dual colors
- Dual color strips have twice the LED's of single colors. Colors alternate down strip to give a full length color display.



Single color




Dual color

SPECIFICATIONS

Operating Voltage: 12VDC

3/8" (10mm) high, 11/16" (18mm) wide, 6' - 48" long

Max power 0.8 Amps (24inch)
18" sheathed cable

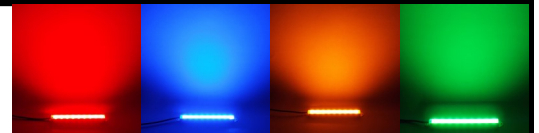

| PART NUMBERS | RED | BLUE | AMBER | GREEN | RED-WHITE | RED-BLUE | AMBER WHITE |
|--------------|-------------|-------------|-------------|------------|-------------|-------------|-------------|
| 6 " | STX1-R | STX1-B | STX1-A | STX1-G | STX1-RW | STX1-RB | STX1-AW |
| 12" | STX3-R | STX3-B | STX3-A | STX3-G | STX3-RW | STX3-RB | STX3-AW |
| 24" | STX6-R | STX6-B | STX6-A | STX6-G | STX6-RW | STX6-RB | STX6-AW |
| 48" | STX12-R | STX12-B | STX12-A | N/A | N/A | N/A | N/A |

STIX DUAL SWITCHED

FEATURES

- Stix are a low cost Rigid LED Light strip steady burn non flash.
- Waterproof (IP65) resin filled Aluminum strip.
- Colored and White LED's alternate along the strip.
- Black switch controls White LED's, Orange switch Controls Red or Amber LED's.
- Available in 7 inch, 12 inch and 24 inches.




SPECIFICATIONS

Operating Voltage: 12VDC

3/8" (10mm) high, 11/16" (18mm) wide, 6' - 24" long

Max power 0.8 Amps (24inch)

18" sheathed cable.

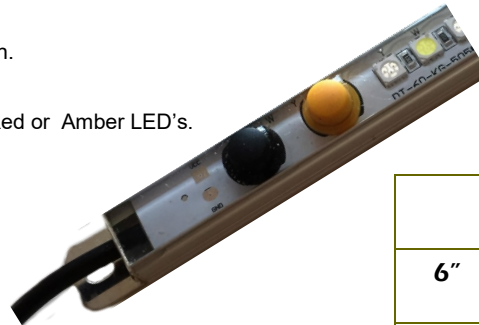

| | RED-WHITE | AMBER-WHITE |
|-----|--------------|--------------|
| 6" | SSTX1-RW | SSTX1-AW |
| 12" | SSTX3-RW | SSTX3-AW |
| 24" | SSTX6-RW | SSTX6-AW |

STIX BLACK HOUSING

FEATURES

- The same Dual switched light above with a black housing and circuit board.
- Stix are a low cost Rigid LED Light strip steady burn non flash.
- Waterproof (IP65) resin filled Aluminum strip.
- Colored and White LED's alternate along the strip.
- Black switch controls White LED's, Orange switch Controls Amber LED's.
- 24" available now. 12" and 6" late 2023



SPECIFICATIONS

Operating Voltage: 12VDC

3/8" (10mm) high, 11/16" (18mm) wide, 6' - 24" long

Max power 0.8 Amps (24inch)

18" sheathed cable. IP65



| | AMBER-WHITE |
|-----|---------------|
| 6" | SSTX1B-AW |
| 12" | SSTX3B-AW |
| 24" | SSTX6B-AW |

STXCAB-6

SPECIFICATIONS


Part # STXCAB-6

A non switched Slimline strip light
Surface mount via two concealed
brackets

Voltage: 12VDC, IP33 Interior
only

LED Color: 5000K natural white
White polymer ends, Aluminum
extrusion with frosted lens.
24" (600mm) long, 1
1/2" (39mm) wide, 3/8" (10mm)
deep.

Lumens: 722 lm.

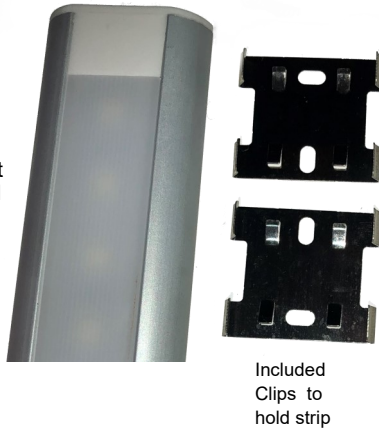

Included
Clips to
hold strip



CORNER STIX

FEATURES

- White LED rigid strip lighting.
- IP33 Cabinet lighting.
- Interior use only
- Specifically designed to mount in the corner.

SPECIFICATIONS

Part Number: STXCNR6

Operating Voltage: 12VDC

Color temperature: 6000K

LED Chipset: 50/50

Actual Lumens: 792 lm

24" (600mm) x 1 1/16" (18mm)
X 1 1/16" (18mm)

IP33 Interior use only



Included
Clips to
hold strip

CORNER STIX

FEATURES

- White LED rigid strip lighting.
- IP67 waterproof Cabinet lighting.
- Can be used inside or outside.
- Specifically designed to mount in the corner.

SPECIFICATIONS

Part Number: STXQTR3

Operating Voltage: 12VDC

Color temperature: 6000K

LED Chipset: 50/50 IP65

Actual Lumens: 396 lm

12" (300mm) x 5/8" (16mm)
X 5/8" (16mm)



Included
Clips to
hold strip

PORTABLE LIGHTING KIT

The Portable lighting kit gives you area lighting that runs of a vehicle 12V system. With a multitude of uses including command tents, temporary lighting and just camping, You will be amazed at the flexibility of this system.

Kit includes

4 x 21 inch LED stixs, connecting cable, 1 x Alligator clips to female cigar socket. 1x cigar plug with 9' 10" (3m) of cable, 2 x interconnect cables 8' 2" (2.5m), 1 x interconnect cables 16' 4" (5m), 1 x 2way splitter, 1 x on/off switch, 1 x dimming switch, 8 x Velcro ties, mat and carry bag . IP65 waterproof.



QUICK CONNECT

4WD

NEW

From 2023 we will gradually change over all of our STIX products to the "quick connect" system replacing the previous standard bare wires. The quick connect system uses a waterproof screw in connector that will connect to any of the following accessories for quick and easy installation of the light. If you would prefer to hardwire the light like previous models, the connector can be cut off and the wires exposed.



STXCAB8
Cable 8'



STXCAB16
Cable 16'



STXSP2
2 way splitter



STXSP3
3 way splitter



STXD2
Dimmer On-off



STXCIG9
Cig adaptor 9'



STXACLIP
Cig to Clips

SMR-1



SPECIFICATIONS

Part # SMR-1S

Voltage: 10~30VDC, IP67
Max Watt: 25.5W
LED Color: 4500K natural white
Construction: White polymer housing with frosted lens
Certification: ECE R10, EMC, ROHS
Lumens: Actual 1249 lm
Size: 5 1/8" (130)mm dia, 19/32" (14mm) deep
Soft Touch Switch, High intensity / Medium intensity / low intensity / Off
Switch constantly illuminated blue



SMR-2S



SPECIFICATIONS

Part # SMR-2S

Voltage: 10~30VDC, IP65
Max Watt: 17.4W
LED Color: 4500K natural white
Construction: White Aluminum housing with frosted lens
Certification: ECE R10, EMC, ROHS
Lumens: Actual 852 lm
Size: 5 1/8" (130)mm dia, 19/32" (14mm) deep
On/Off Soft Touch switch built in.
Switch constantly illuminated blue



SMR-3



SPECIFICATIONS

Part # SMR-3

Voltage: 10~30VDC IP65
Max Watt: 18.2W
LED Color: 4500K natural white
Construction: White polymer housing with frosted lens
Certification: ECE R10
Lumens: Actual 891 lm
Size: 5 1/8" (130)mm dia, 1/2" (12mm) deep.



SMO2



SPECIFICATIONS

Voltage: 10~30VDC,
Waterproof IP67.
Max Watt: 17.4W.
LED Color: 4500K natural white.
Construction: White polymer housing with frosted lens.
Certification: ECE R10, ROHS.
Size: 2 5/8" (66 mm) high, 3/4" (19mm) deep
 Touch Switch, High intensity/ Medium intensity/
 low intensity/Off .
 Switch constantly illuminated blue.

| PART # | LENGTH | LUMENS | SWITCH |
|--------|-----------------|---------|--------|
| SMO-1 | 5,1/4" (140mm) | 661lm | NO |
| SMO-1S | 5,1/4" (140mm) | 661 lm | Touch |
| SMO-2 | 7,9/16" (186mm) | 1029 lm | NO |
| SMO-2S | 7,9/16" (186mm) | 1029 lm | Touch |



SMO3



SPECIFICATIONS

Surface mount with concealed screws either end.
Voltage: 10~30VDC, IP67.
Waterproof IP67.
Max Watt: 4.4W (SMO36), 11.6W (SMO312), 26.8W (SMO324).
LED Color: 4500K natural white.
Size: 2 1/8" (54 mm) wide, 1/2" (12mm) deep.
 Touch ON/Off Switch, constantly illuminated blue.

| PART # | LENGTH | LUMENS | SWITCH |
|----------|-----------------|---------|--------|
| SMO-36 | 6 7/32" (160mm) | 294 lm | NO |
| SMO-36S | 6 7/32" (160mm) | 294 lm | Touch |
| SMO-312 | 12" (300mm) | 568 lm | NO |
| SMO-312S | 12" (300mm) | 568 lm | Touch |
| SMO-324 | 24" (600mm) | 1314 lm | NO |
| SMO-324S | 24" (600mm) | 1314 lm | Touch |



SMO-45



SPECIFICATIONS

45 degree area light
Voltage: 10~30VDC, IP67.
Max Watt: 12W.
LED Color: 4500K natural white.
Construction: White polymer ends, concealed screws, Aluminum extrusion with frosted lens.
Certification: ECE R10, ROHS.
Size: 2,3/8" (60 mm) high, 1,3/8" (34mm) deep.
 Touch ON/Off Switch,
 Switch constantly illuminated blue.

| PART # | LENGTH | LUMENS | SWITCH |
|----------|-------------------|--------|--------|
| SMO-451 | 5,1/4" (205mm) | 448 lm | NO |
| SMO-451S | 5,1/4" (205mm) | 448 lm | Touch |
| SMO-452 | 11,13/16" (305mm) | 840 lm | NO |
| SMO-452S | 11,13/16" (305mm) | 840 lm | Touch |



LED FLASHER

FEATURES

- Compact LED flasher module.
- 2 outputs.
- 5 amps per output.
- 18 user selectable Flash Patterns.
- Dim mode.
- Cruise mode.
- 2 year warranty.

SPECIFICATIONS

Part # 20PF

Operating Voltage: 10~30VDC

Power: 5 amps per output.

Output Voltage: Equal to input voltage



Available Early 2024

MINI-2 WORK LIGHT

oz4WD

FEATURES

- 2x 5W Philips Lumileds LED's.
- Optics Pattern: Spot + Flood Combo; 30 degree + 60 degree
- Aluminum housing.
- U shaped bracket allows adjustment up and down.
- Polycarbonate lens.
- Waterproof: IP67.
- 1 year warranty.

SPECIFICATIONS

Part #

GX102S - Spot beam

GX102F - Flood beam

Operating Voltage: 10~32VDC

Power: 10 watts

Waterproof: IP67

3" (76mm) x 1,7/8" (47mm) x 1,7/8" (47mm)



10 WATT SPOT

oz4WD

FEATURES

- High power 10W Cree LED chip.
- Super tight spot beam and wide angle flood available.
- Strong Aluminum housing.
- Expandable Modular driving light: can be linked or stacked together to make multiple arrays.
- Gold anodized fascia and black housing.
- L shaped bracket allows adjustment up and down.
- Available in Spot, or Flood.
- 6" cable with Deutsch 2 pin male connector .
- Polycarbonate lens.
- 1year warranty.

SPECIFICATIONS

Operating Voltage: 10~32VDC.

Power: 10 watts.

Amps: 0.89A@12V, 0.45A@24V.

Color temperature: 6000K.

Waterproof: IP67.

Raw Lumens: 1200 lm.

Actual Lumens: 909.7 lm.



MINI-4 WORK LIGHT



FEATURES

- 4x 3W Philips Lumileds LED's.
- Optics Pattern: Spot + Flood Combo; 30 degree + 60 degree
- Aluminum housing.
- U shaped bracket allows adjustment up and down.
- Polycarbonate lens.
- Waterproof: IP67
- 1 year warranty.

SPECIFICATIONS

Part

GX104S - Spot beam

GX104F - Flood beam

Operating Voltage: 10~32VDC

Power: 12 watts

LED's: 4 x 3 Watt

5" (127mm) x 1,7/8" (47mm) x 1,7/8" (47mm)



RECESSED WORK LIGHT



FEATURES

- Aluminum housing.
- Step light, recessed work light.
- Polycarbonate lens.
- Made to recess into body.
- Spot or Flood beam optics.
- 1 year warranty.

SPECIFICATIONS

Part # GR102F flood GR102S spot.

Operating Voltage: 10~32VDC.

LED's: 2 x 5 Watt Lumileds.

Waterproof: IP67.

4,19/64" (109mm) x 2,3/8" (60mm) x 1,5/8" (41mm)

SPECIFICATIONS

Part # GR104F flood GR104S spot.

Operating Voltage: 10~32VDC.

LED's: 4 x 3 Watt Lumileds.

Waterproof: IP67.

6,5/16" (160mm) x 2,3/8" (60mm) x 1,5/8" (41mm)



CUBE-2 WORK LIGHT



FEATURES

White work light with colored DRL

- 4 x 5W Philips Lumileds LED's.
- Fresnel Optics with double angle reflector cups.
- TCP Thermal Conductive Plastic housing. No corrosion!
- Cross DRL Daytime Running Light.
- Lightweight—around 70% lighter than the original cube.
- U shaped bracket allows adjustment up and down.
- 18" cable with Deutsch connector.
- Polycarbonate lens.
- Waterproof: IP67
- 1 year warranty.

SPECIFICATIONS

Operating Voltage: 10~32VDC.

Power: 20 watts.

Amps: 1.67A@12V, 0.84A@24V.

Amps DRL: 0.59@12Vdc.

Color temperature: 6000K.

Lumens: 1080 lm (1200 lm raw).

Part Numbers:

DR3 White DRL

DR3R Red DRL

DR3B Blue DRL

DR3A Amber DRL



CROSS




FEATURES

- 12 x 3W LED's
- TCP Thermal Conductive Plastic housing. No corrosion!
- Available in Spot, Flood and a combination of both.
- 18" cable with Deutsch 2 pin male connector .
- Size 5 1/2" (143mm) round, 3" (77mm) deep, 6 5/16" (143mm) high on bracket.
- Polycarbonate lens, lightweight
- 1 year warranty.

Part Numbers:

CR6515S Spot white housing
 CR6515F Flood white housing
 CR6515C Combo white housing
 CR6515BS Spot black housing
 CR6515BF Flood black housing
 CR6515BC Combo black housing



5 INCH



FEATURES

Part # SAR5

- 5" round driving light
- 6 x 10 watt Cree LED Chips
- Voltage 10-60V DC
- Cast aluminum housing with Stainless hardware and bracket
- Polycarbonate lens.
- Clear Polycarbonate lens protector with side diffuser included.
- Lumens: Raw 4200 lm, Actual 3364 lm
- Certification: ROHS.
- Size 6" (126mm) round, 4" (100mm) deep, 4 1/2" (115mm) high on bracket.
- 1 year warranty



7 INCH



FEATURES

- 7 inch driving light.
- 9 x 10 watt Cree XML LED Chips. 90 watts total.
- Cast aluminum housing with Stainless hardware and bracket.
- Polycarbonate lens. Clear Polycarbonate lens protector with side diffuser included.
- Certification: ROHS.
- Size 7" (178mm) diameter, 5 3/4" (150mm) deep, 7 3/4" (194mm) with bracket.
- 1 year warranty.

SPECIFICATIONS

Operating Voltage: 10-60VDC.
Max watts 90W.
Waterproof: IP68.
Raw Lumens: 6750 lm.
Actual Lumens: 5487 lm.

Part Numbers: **SAR7**



SLIMLINE SINGLE




FEATURES

- 5 watt LED's
- 1,1/4" (31mm) high, 2" (50mm) deep
- Sealed deutsch connector, loom with switch and relay.
- Pattern: Spot + Flood Combo; 30 degree + 60 degree
- Polycarbonate lens.
- 1 year warranty.
- IP67

SPECIFICATIONS

Operating Voltage: 9~32VDC
Color temperature: 5000-6000K
Housing: Die cast aluminum

| Part # | Length | Watts | Raw Lumen |
|--------|--------|-------|-----------|
| DS20 | 20" | 90 | 9,000 |
| DS30 | 31.5" | 150 | 15,000 |



SINGLE ROW



| Part # | Length | Watts | Raw Lumen |
|--------|--------|-------|-----------|
| DM1-7 | 6.5" | 18 | 1,800 |
| DM1-10 | 12" | 30 | 3,000 |
| DM1-20 | 21.5" | 60 | 6,000 |
| DM1-30 | 31.5" | 90 | 9,000 |
| DM1-40 | 41.5" | 120 | 12,000 |
| DM1-50 | 51.75" | 150 | 15,000 |

FEATURES

- Philips Lumileds ZES LED's 3 watt each.
- Available in six lengths 6.5", 12", 21", 31", 41", & 51".
- 1,5/8" (41mm) high, 3" (76mm) deep
- Military specification breather keeps the moisture out.
- Sealed deutsch connector, loom with switch and relay.
- Pattern: Spot + Flood Combo; 30 degree + 60 degree
- Polycarbonate lens.
- 1 year warranty.
- IP67

SPECIFICATIONS

Operating Voltage: 9~32VDC
Color temperature: 5000-6000K
Housing: Die cast aluminum



DUAL ROW



FEATURES

- Philips Lumileds ZES LED's 3 watt each.
- Available in six lengths 8", 14", 21", 31", 41", & 50".
- 3" (76mm) high, 3 1/4" (83mm) deep
- Military specification breather keeps the moisture out.
- Sealed deutsch connector, loom with switch and relay.
- Optics : Spot + Flood Combo; 30 degree + 60 degree
- Polycarbonate lens.
- 1 year warranty.
- IP67

SPECIFICATIONS

Operating Voltage: 9~32VDC
Color temperature: 5000-6000K
Housing: Die cast aluminum




| Part # | Length | Watts | Raw Lumen |
|--------|--------|-------|-----------|
| DM2-7 | 8" | 36 | 3,600 |
| DM2-10 | 14" | 72 | 7,200 |
| DM2-20 | 22" | 120 | 12,000 |
| DM2-30 | 32" | 180 | 18,000 |
| DM2-40 | 42" | 240 | 24,000 |
| DM2-50 | 52.5" | 300 | 30,000 |





Eight Emergency Vehicle Products Manufacturer

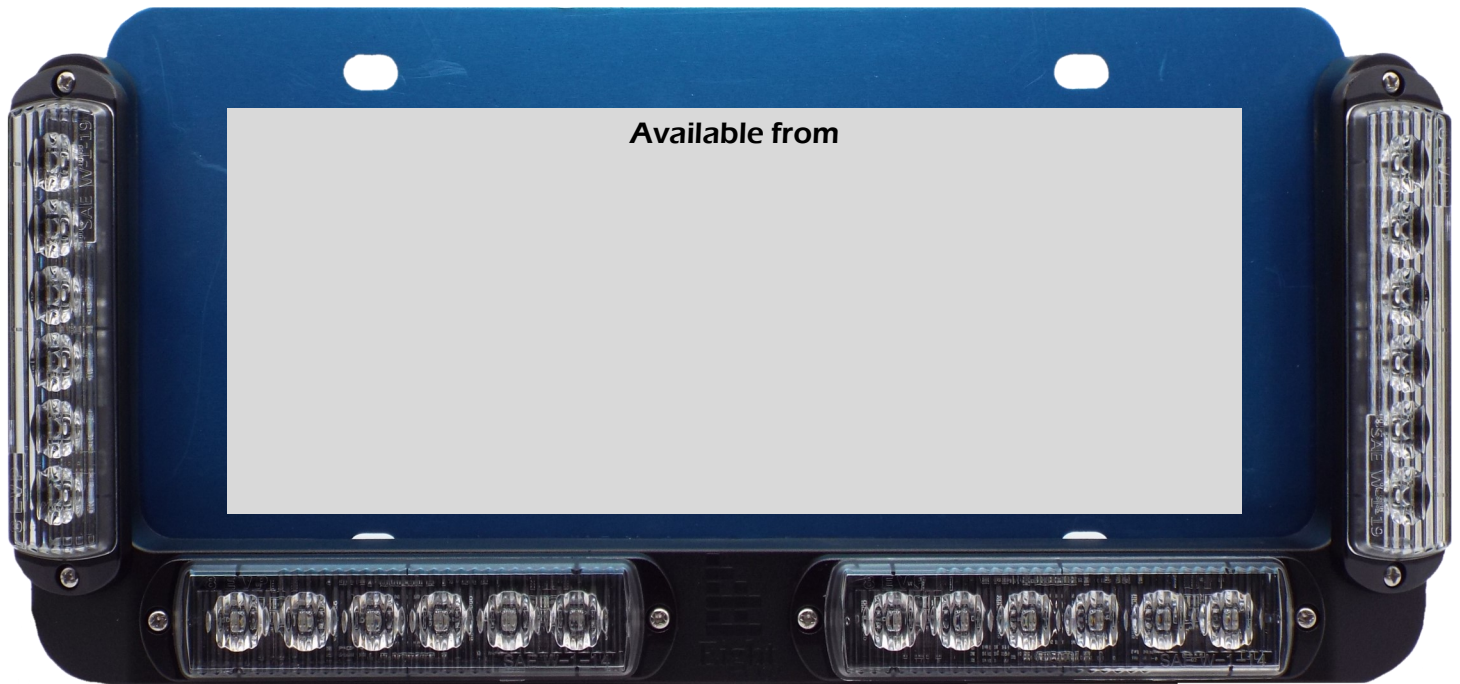

Innovation. Quality. Dependability.

These are just a few of the qualities which Eight EVP prides itself on as a manufacturer of LED emergency warning lights.

Our mission is to deliver the best value to all our customers by providing high-quality, innovative, reliable products at competitive prices with exceptional customer service.

Eight EVP LLC

Nashville Tennessee

www.8evp.com