



Eight EVP LLC

3730 Dickerson Pike Nashville TN 37207 USA
 Telephone :615.868.1588
 Website: 8evp.com
 E-mail:sales@8evp.com

WARNING

This product contains high-powered LEDs. Avoid staring into light at close range or for excessive periods of time.

DS600 DASH VISOR Instruction Manual


SAE J595 Class 1 & CA Title 13 Approved

Technical Specifications	
Dimensions	171mm x 115m x 78mm
Input Voltage	10-40 VDC
Operating Temperature	- 30° to + 55°C
Current Consumption	1.3A (MAX) @ 12.5V
LED Power	6 x 3W per LED



Initial Setup to Power Supply:

Ensure the Power Supply is 12/ 24VDC


Single Switch Cigar Plug



Power Switch (On/Off Switch)

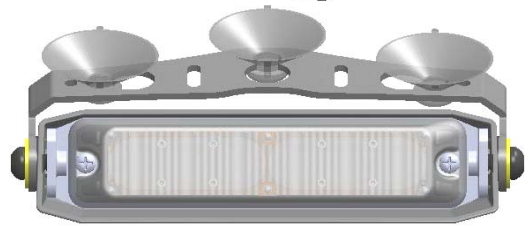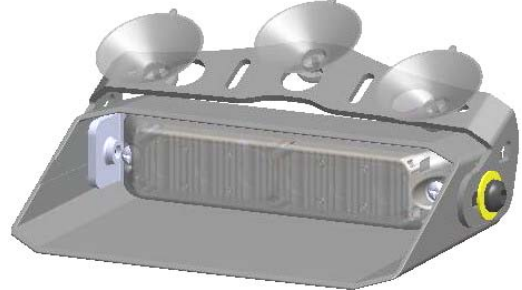

Rear

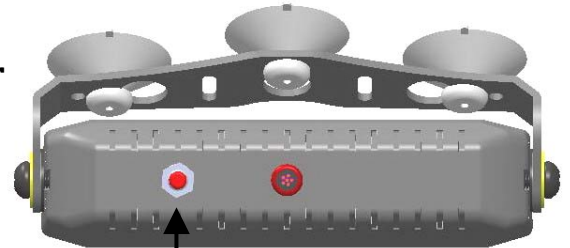

Button for Pattern Selection

Flash pattern selection :

Push the button in the rear, less than 1 second for next pattern, 1 to 3 seconds for previous pattern, more than 3 seconds return to the pattern 1.

Pattern List

Pattern List							
P1	Quad flash Phase 1	75 / minute	Simultaneous	P21	Quad Flash Phase 1	125 / minute	Alternating
P2	Quad flash Phase 2	75 / minute	Simultaneous	P22	Quad flash Phase 2	125 / minute	Alternating
P3	Triple flash Phase 1	75 / minute	Simultaneous	P23	Quad flash Phase 1	180 / minute	Alternating
P4	Triple flash Phase 2	75 / minute	Simultaneous	P24	Quad Flash Phase 2	180 / minute	Alternating
P5	Double flash Phase 1	75 / minute	Simultaneous	P25	All-in single x 4 + all in quad x 2 (no sync)	180 + 75 / minute	
P6	Double flash Phase 2	75 / minute	Simultaneous	P26	All-in single x 4 + all in quad x 2 (no sync)	180 + 75 / minute	
P7	Single Flash Phase 1	75 / minute	Simultaneous	P27	All-in quad x 2 + all in double x 2 + alt quadx2 (no sync)	75/125/125/min	
P8	Single Flash Phase 2	75 / minute	Simultaneous	P28	All-in quad x 2 + all in double x 2 + alt quadx2 (no sync)	75/125/125/min	
P9	Quad flash Alternating Phase 1	75 / minute	Alternating	P29	Breathing slow (no sync)		
P10	Quad flash Alternating Phase 2	75 / minute	Alternating	P30	Breathing fast (no sync)		
P11	Triple flash Alternating Phase 1	75 / minute	Alternating	P31	Steady on half/ quad other half Phase1	75 / minute	
P12	Triple flash Alternating Phase 2	75 / minute	Alternating	P32	Steady on half/ quad other half Phase2	75 / minute	
P13	Double flash Alternating Phase 1	75 / minute	Alternating	P33	Steady on half/ single other half Phase1	75 / minute	
P14	Double flash Alternating Phase 2	75 / minute	Alternating	P34	Steady on half/ single other half Phase2	75 / minute	
P15	Single Flash Alternating Phase 1	75 / minute	Alternating	P35	Quad other half /Steady on half Phase1	75 / minute	
P16	Single Flash Alternating Phase 2	75 / minute	Alternating	P36	Quad other half /Steady on half Phase2	75 / minute	
P17	Quad flash Simultaneous Phase 1	125 / minute	Simultaneous	P37	Single other half /Steady on half Phase1	75 / minute	
P18	Quad flash Simultaneous Phase 2	125 / minute	Simultaneous	P38	Single other half /Steady on half Phase2	75 / minute	
P19	Quad Flash Simultaneous Phase 1	180 / minute	Simultaneous	P39	Steady on	3~16 seconds down to 30%	
P20	Quad Flash Simultaneous Phase 2	180 / minute	Simultaneous	P40	Random (combination of flash patterns) (no sync)		

* To review the Limited Warranty Statement & Return Policy for this Eight EVP product please visit our website at www.8evp.com and select the "Warranty & Returns" link on the contact page. If you have questions regarding this product please contact Technical Services, Monday - Friday, 7.30 am to 4 pm central at 615 868 1588. Questions or comments that do not require immediate attention may be emailed to sales@8evp.com

• Warning devices are strictly regulated and governed by Federal, State and Municipal ordinances. These devices shall be used ONLY on approved vehicles. It is the sole responsibility of the user of these devices to ensure compliance.